


Figure 2

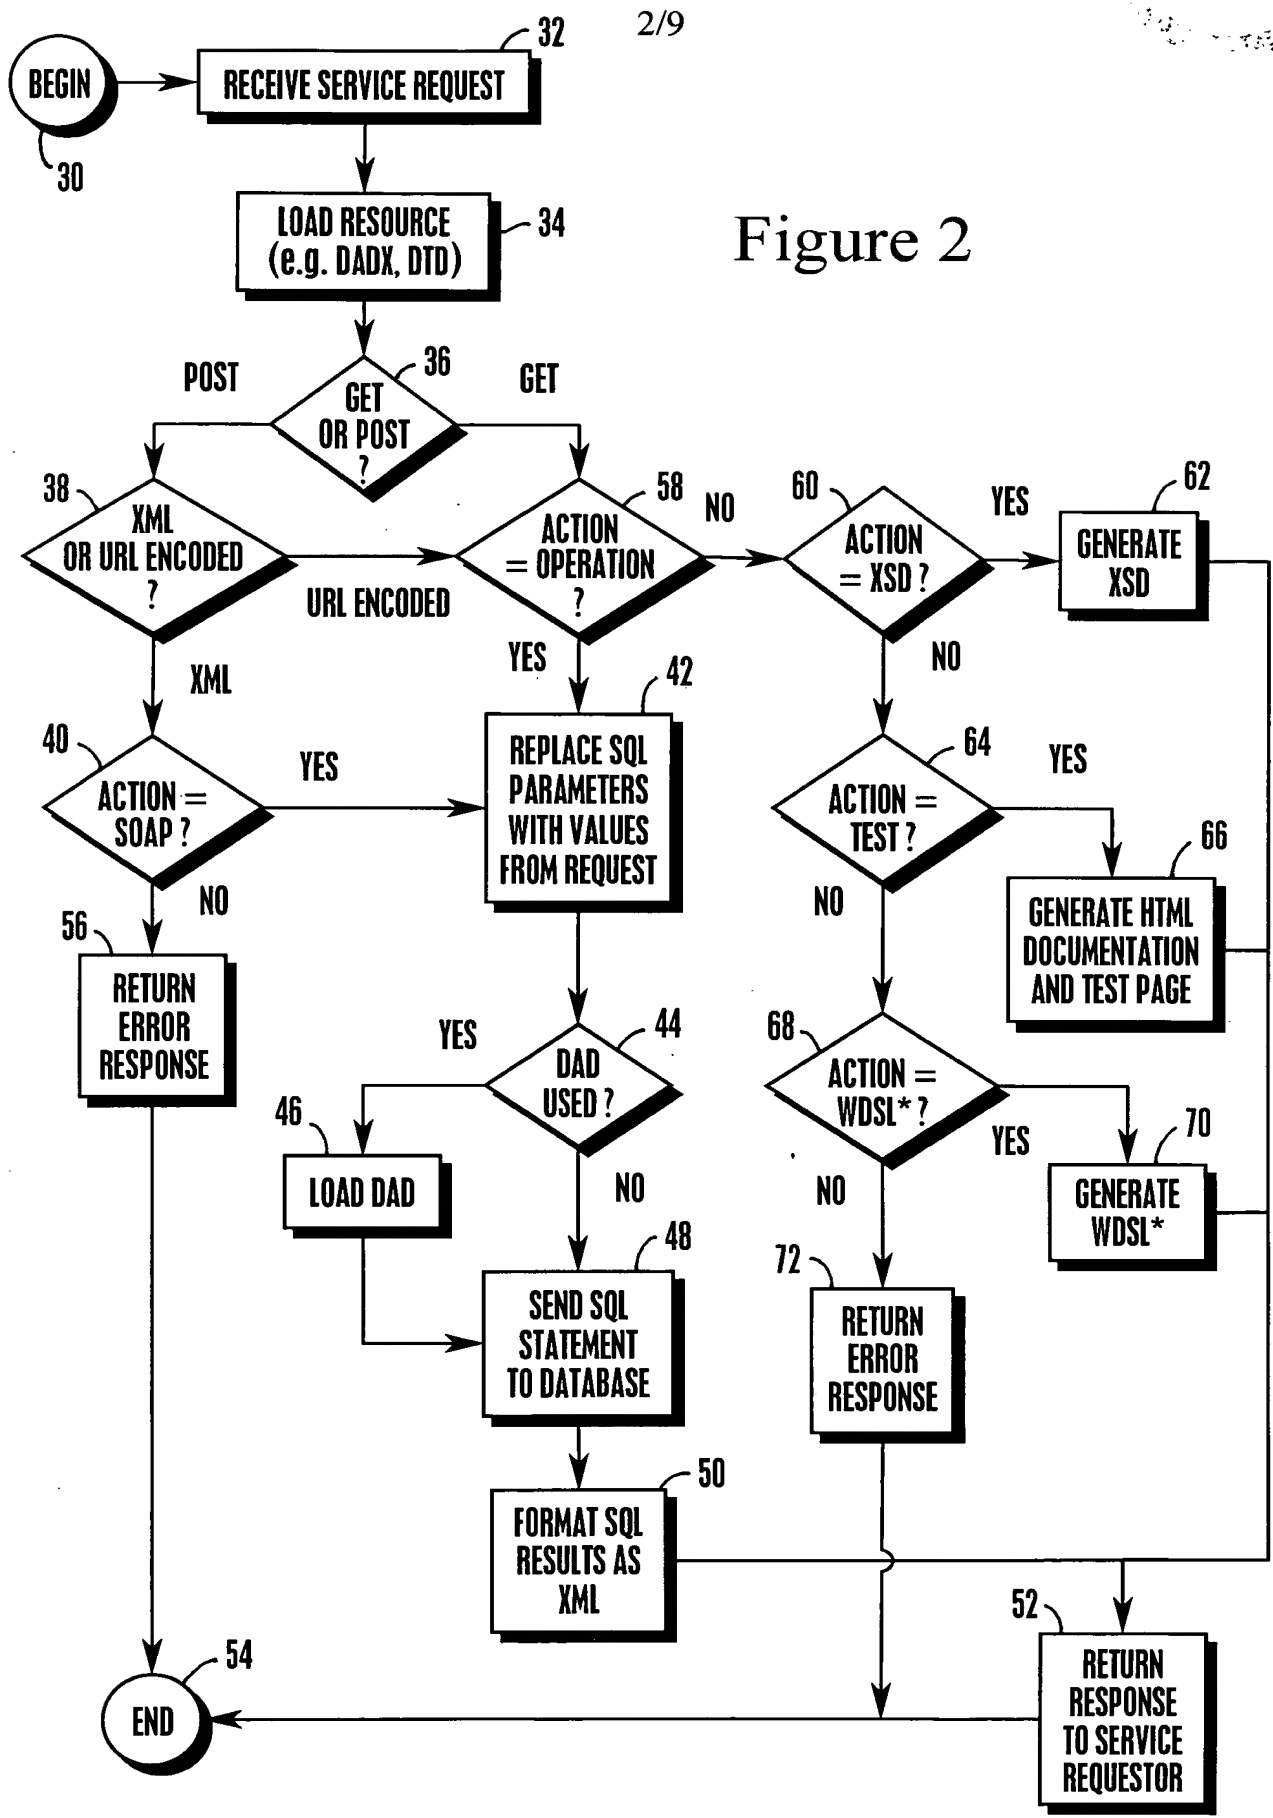

```

<?xml version="1.0"?>
<DADX xmlns="urn:lbm.com:dadx"
  xmlns:xsd="http://www.w3.org/2000/10/XMLSchema">
  <documentation>mycompany part orders service.</documentation>

```

```

70 ~ <operation name="findAll">
  <documentation>Returns all the orders.</documentation>
  <retrieveXML>

```

```

76 ~ <DAD_ref>getstart_xcollection.dad</DAD_ref>

```

```

  <SQL_override>

```

```

    select o.order_key, customer_name, customer_email,
    p.part_key, color, quantity, price, tax, ship_id, date, mode
    from order_tab o, part_tab p,
    table(select substr(char(timestamp(generate_unique()))).16) as ship_id,
    date, mode, part_key from ship_tab) s

```

```

84 ~ where p.order_key = o.order_key and s.part_key = p.part_key
    order by order_key, part_key, ship_id

```

```

  </SQL_override>

```

```

  </retrieveXML>

```

```

</operation>

```

```

72 ~ <operation name="findByColor">

```

```

  <documentation>Returns all the orders that have the specified color.</documentation>

```

```

  <retrieveXML>

```

```

76 ~ <DAD_ref>getstart_xcollection.dad</DAD_ref>

```

```

  <SQL_override>

```

```

    select o.order_key, customer_name, customer_email,
    p.part_key, color, quantity, price, tax, ship_id, date, mode
    from order_tab o, part_tab p,
    table(select substr(char(timestamp(generate_unique()))).16) as ship_id,
    date, mode, part_key from ship_tab) s

```

```

86 ~ where p.order_key = o.order_key and s.part_key = p.part_key
    and color = color
    order by order_key, part_key, ship_id

```

```

  </SQL_override>

```

```

  <parameters>

```

```

    <parameter name="color" type="xsd:string"/>

```

```

  </parameters>

```

```

  </retrieveXML>

```

```

</operation>

```

Figure 3A

```

74 ~ <operation name="findByMinPrice">
    <documentation>Returns all the orders that have a price greater than or equal to the
        specified minimum price.</documentation>
    <retrieveXML>
76 ~ <DAD_ref>getstart_xcollection.dad</DAD_ref>
    <SQL_override>
82 { select o.order_key, customer_name, customer_email,
      p.part_key, color, quantity, price, tax, ship_id, date, mode
      from order_tab o,part_tab p,
      table(select substr(char(timestamp(generate_unique()))).16) as ship_id,
      date, mode, part_key from ship_tab) s
88 ~ where p.order_key = o.order_key and s.part_key = p.part_key
      and p.price >= :minprice
      order by order_key, part_key, ship_id
    </SQL_override>
    <parameters>
      <parameter name="minprice" type="xsd:decimal"/>
    </parameters>
    </retrieve XML>
  </operation>
</DADX>

```

Figure 3B

```

<?xml version="1.0"?>
<schema xmlns="http://www.w3.org/2000/10/XMLSchema"
targetNamespace="urn:ibm.com:dxx:dadx"
xmlns:dadx="urn:ibm.com:dxx:dadx">

  <annotation>
    <documentation>A DADX document defines a Web Service implemented by operations that use
      the DB2 XML Extender.
    </documentation>
  </annotation>

  <element name="DADX">

    <complexType>
      <sequence>
        <element ref="dadx:documentation" minOccurs="0"/>
        <element ref="dadx:implements" minOccurs="0"/>
        <element ref="dadx:operation" maxOccurs="unbounded"/>
      </sequence>
    </complexType>

    <unique name="operationNames">
      <selector xpath="dadx:operation"/>
      <field xpath="@name"/>
    </unique>

  </element>

  <element name="documentation">
    <complexType mixed="true">
      <choice minOccurs="0" maxOccurs="unbounded">
        <any minOccurs="0" maxOccurs="unbounded"/>
      </choice>
      <any Attribute?>
    </complexType>
  </element>

```

Figure 4A

```

<element name="implements">
  <complexType>
    <attribute name="namespace" type="uriReference" use="required"/>
    <attribute name="location" type="uriReference" use="required"/>
  </complexType>
</element>

<element name="operation">
  <complexType>
    <sequence>
      <element ref="dadx:documentation" minOccurs="0"/>
      <choice>
        <element ref="dadx:retrieveXML"/>
        <element ref="dadx:storeXML"/>
104 ~~~~~ <element ref="dadx:query"/>
106 ~~~~~ <element ref="dadx:update"/>
108 ~~~~~ <element ref="dadx:call"/>
      </choice>
    </sequence>
    <attribute name="name" type="NCName" use="required"/>
  </complexType>
</element>

  <element names="retrieveXML">

    <complexType>
      <sequence>
        <choice>
          <element ref="dadx:DAD_ref"/>
          <element ref="dadx:collection_name"/>
        </choice>
        <choice>
          <element name="no override">
            <complexType/>
          </element>

```

Figure 4B

```

112  ~ <element name="SQL_override" type="string"/>
      <element name="XML_override" type="string"/>
      </choice>
110  ~ <element ref="dadx:parameter" minOccurs="0" maxOccurs="unbounded"/>
      </sequence>
      </complexType>

      <unique name="parameterNames">
        <selector xpath="dadx:parameter"/>
        <field xpath="@name"/>
      </unique>

    </element>

    <element name="storeXML">
      <complexType>
        <choice>
          <element ref="dadx:DAD_ref"/>
          <element ref="dadx:collection_name"/>
        </choice>
      </complexType>
    </element>

    <element name="query">
      <complexType>
        <sequence>
114  ~ <element name="SQL_query" type="string"/>
          <element ref="dadx:XML_result" minOccurs="0" maxOccurs="unbounded"/>
110  ~ <element ref="dadx:parameter" minOccurs="0" maxOccurs="unbounded"/>
          </sequence>
        </complexType>

        <unique name="XML_resultNames">
          <selector xpath="dadx:XML_result"/>

```

Figure 4C

```

    <field xpath="@name"/>
  </unique>

  <unique name="parameterNames">
    <selector xpath="dadx:parameter"/>
    <field xpath="@name"/>
  </unique>

</element>

<element name="update">

  <complexType>
    <sequence>
116 ~ <element name="SQL_update" type="string"/>
110 ~ <element ref="dadx:parameter" minOccurs="0" maxOccurs="unbounded"/>
    </sequence>
  </complexType>

  <unique name="parameterNames">
    <selector xpath="dadx:parameter"/>
    <field xpath="@name"/>
  </unique>

</element>

<element name="call">

  <complexType>
    <sequence>
118 ~ <element name="SQL_call" type="string"/>
110 ~ <element ref="dadx:parameter" minOccurs="0" maxOccurs="unbounded"/>
    </sequence>
  </complexType>

```

Figure 4D



```

<unique name="parameterNames">

  <selector xpath="dadx:parameter"/>
  <field xpath="@name"/>
</unique>

</element>

<element name="no_override">
  <complexType/>
</element>

<element name="DAD_ref" type="string"/>

<element name="parameter">
  <complexType>
    <attribute name="name" type="NCName" use="required"/>
    <attribute name="element" type="QName"/>
    <attribute name="type" type="QName"/>
    <attribute name="kind" type="dadx:parameterKindType" default="in"/>
  </complexType>
</element>

<simpleType name="parameterKindType">
  <restriction base="string">
    <enumeration value="in"/>
    <enumeration value="out"/>
    <enumeration value="in/out"/>
  </restriction>
</simpleType>

<element name="XML_result">
  <complexType>
    <attribute name="name" type="NCName" use="required"/>
    <attribute name="element" type="QName" use="required"/>
  </complexType>
</element>

</schema>

```

Figure 4E